


# MAP Large Channel Count Switch (mLCS-A1)

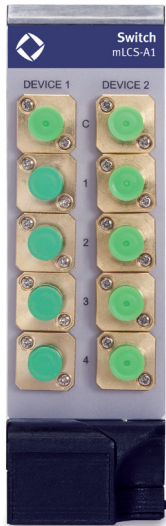

## Key Features

- Insertion loss (IL) <0.7 dB and return loss (RL) >57 dB
- Low polarization dependent loss (PDL) 0.04 dB
- Up to 1x50 switch configurations in a single width cassette
- Single and dual 2xN switch configurations

## Applications

- Dense wavelength division multiplexing (DWDM) channel testing
- Amplifier characterization
- Bit error rate (BER) testing
- Signal routing

## Safety Information

- The MAP Large Channel Count Switch, when installed in a MAP chassis, complies to CE, CSA/UL/IEC61010-1, plus LXI Class C requirements.

The Multiple Application Platform (MAP) Large Channel Count Switch (mLCS-A1) is optimized for the industry-leading JDSU MAP-200 platform. Based on the previous-generation MAP, the MAP-200 is the first photonic layer lab and manufacturing platform that is LAN Extensions for Instrumentation (LXI)-compliant by conforming to the required physical attributes, Ethernet connectivity, and interchangeable virtual instrument (IVI) drivers. The MAP-200 platform is optimized for density and maximum configurability to meet specific application requirements in the smallest possible foot print.

The MAP Large Channel Count Switch is based on JDSU expanded beam and alignment technologies and exhibits low insertion loss (IL) and high return loss (RL). It is available in single-switch configurations from 1x4 up to 1x50, dual independent switch configurations from 1x4 up to 1x25, and both single and dual independent switch configurations from 2x4 to 2x16. An important element of an optical test bed, optical switches increase throughput by enabling time-saving automation, reduce uncertainty from repeated connector mating, and maximize expensive testers.

2

Specifications

Parameter	Single-mode fiber SMF 9/125 Typical/Maximum	Multimode fiber MMF 50/125 and 62.5/125 Typical/Maximum
Wavelength range	1270 to 1670 nm	850 to 1310 nm
Insertion loss (IL) <sup>1</sup> (N = number of output channels)		
N ≤ 25	0.5 dB/0.7 dB	0.4 dB/0.6 dB
N > 25, 2xN	0.8 dB/1.2 dB	0.7 dB/1.0 dB
Polarization dependent loss (PDL) <sup>1</sup>		
N ≤ 25	0.02 dB/0.04 dB	N/A
N > 25, 2xN	0.04 dB/0.08 dB	N/A
Return loss (RL) <sup>1,2</sup>		
N ≤ 25	62 dB/57 dB	25 dB/20 dB
N > 25, 2xN	55 dB/45 dB	20 dB/20 dB
IL Stability		
N ≤ 25		±0.02 dB/±0.025 dB
N > 25, 2xN		±0.03 dB/±0.04 dB
Repeatability sequential switching		
N ≤ 25		±0.005 dB/±0.01 dB
N > 25, 2xN		±0.01 dB/±0.03 dB
Repeatability random switching		
N ≤ 25		±0.01 dB/±0.05 dB
N > 25, 2xN		±0.03 dB/±0.08 dB
Crosstalk		
N ≤ 25		-80 dB/N/A
N > 25, 2xN		-80 dB/N/A
Switching time (first channel / each additional channel)		25 ms/15 ms
Maximum input power (optical)		300 mW
Lifetime		>100 million cycles
Operating temperature		-5 to 55°C
Storage temperature		-30 to 60°C
Dimensions (W x H x D)		4.06 x 13.26 x 37.03 cm (1.6 x 5.22 x 14.58 in)
Weight		1.3 kg (2.87 lb) maximum (varies with configuration)

1. Excluding connectors. All optical measurements taken after temperature has been stabilized for one hour
2. RL is based on 1 m pigtail (equivalent to bulkhead version)

### 3

#### Ordering Information

For more information on this or other products and their availability, please contact your local JDSU account manager or JDSU directly at 1-800-498-JDSU (5378) in North America and +800-5378-JDSU worldwide or via e-mail at customer.service@jdsu.com.

Product Code	Description
<b>Base Options (Required, select one)</b>	
MLCS-A1104B	Single 1x4 switch, bulkheads
MLCS-A1106B	Single 1x6 switch, bulkheads
MLCS-A1108B	Single 1x8 switch, bulkheads
MLCS-A1112P	Single 1x12 switch, pigtails
MLCS-A1116P	Single 1x16 switch, pigtails
MLCS-A1124P	Single 1x24 switch, pigtails
MLCS-A1132P	Single 1x32 switch, pigtails
MLCS-A1142P	Single 1x42 switch, pigtails
MLCS-A1150P	Single 1x50 switch, pigtails
MLCS-A1204B	Dual independent 1x4 switch, bulkheads
MLCS-A1208P	Dual independent 1x8 switch, pigtails
MLCS-A1212P	Dual independent 1x12 switch, pigtails
MLCS-A1216P	Dual independent 1x16 switch, pigtails
MLCS-A1225P	Dual independent 1x25 switch, pigtails
MLCS-A1104BD	Single 2x4 E configuration switch, bulkheads
MLCS-A1108BD	Single 2x8 E configuration switch, bulkheads
MLCS-A1116PD	Single 2x16 E configuration switch, pigtails
MLCS-A1204PD	Dual 2x4 E configuration switch, pigtails
MLCS-A1208PD	Dual 2x8 E configuration switch, pigtails
MLCS-A1216PD	Dual 2x16 E configuration switch, pigtails
<b>Fiber Type Options (Required, select one)</b>	
M100	9/125 fiber type
M101	50/125 fiber type
M102	62.5/125 fiber type
<b>Connector Options (Required, select one)</b>	
MFP	FC/PC connector type
MFA	FC/APC connector type (for M100 fiber type option only)
MSC	SC/PC connector type
MSU	SC/APC connector type (for M100 fiber type option only)



If the configurations available do not meet your performance requirements, please contact our global sales and customer service team to discuss the potential for specialized solutions.

#### Test & Measurement Regional Sales

<b>NORTH AMERICA</b> TEL: 1 866 228 3762 FAX: +1 301 353 9216	<b>LATIN AMERICA</b> TEL: +1 954 688 5660 FAX: +1 954 345 4668	<b>ASIA PACIFIC</b> TEL: +852 2892 0990 FAX: +852 2892 0770	<b>EMEA</b> TEL: +49 7121 86 2222 FAX: +49 7121 86 1222	<b>WEBSITE: <a href="http://www.jdsu.com/test">www.jdsu.com/test</a></b>
---	--	---	---	--