

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

The Microsemi SSU 2000 and SSU 2000e are fully manageable synchronization systems used by communications network operators to generate and distribute superior synchronization signals for their networks. The SSU 2000 conforms to ANSI standards and is NEBS certified, while the SSU 2000e is ETSI certified. Both systems use the same plug-in cards.

The SSU 2000 and SSU 2000e use the latest hardware and software integration technologies to provide a complete synchronization system for current and future network needs.

### High Capacity, High Availability Architecture

The SSU 2000/SSU 2000e architecture is designed to integrate intelligent, functional cards into a flexible, fully redundant system to satisfy current capacity and synchronization technology requirements and allow incremental capacity growth and deployment of new capabilities with additional plug-in cards as they are needed.

The SDU 2000/SDU 2000e Synchronization Distribution Unit (SDU) expansion shelves connect to a corresponding SSU 2000/SSU 2000e main shelf to provide additional output signals. The expansion shelves use the framing and synchronization features of the main shelf to drive an array of output cards: any combination of T1, E1/2048 kHz, Composite Clock and RS-422 output cards.

T1 and E1 output cards may be configured in redundant pairs providing 20 1+1 fully protected outputs per pair. A fully configured SSU 2000 system provides T1/E1 output total capacity of up to 1280 unprotected ports or 640 protected ports. A fully configured SSU 2000e system supports up to 460 protected or unprotected ports.

### Key Features

- High capacity, modular system
- Integrated GNSS (GPS and GLONASS)
- E1, T1, CC, RS-422 outputs
- RADIUS, SSH option
- Performance monitoring on all inputs
- Management: TL1 and ICS, option for SNMP
- TimePictra Synchronization Management System support

### Key Benefits

- Fully redundant for service delivery protection
- Proven interoperability
- High capacity E1 and T1 ports

### Major Applications

- Primary Reference Source (PRS), PRC based on Global Navigational Satellite System (GNSS)
- SSU, Building Integrated Timing Supply (BITS), Stand Alone Synchronization Equipment (SASE), Timing Signal Generator (TSG)
- SDH/SONET, Ethernet, GPON networks
- 2G/3G and 4G/LTE networks
- Telecommunications, power utility, government, and other private networks



SSU 2000



SSU 2000e

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

Frequency input signals are passed through in case of multiple internal failures, including clock failures. The shelves accept dual DC power and provide independent power conversion on each card. All cards are individually fused to protect the system in case of a short circuit on any one card.

### Industry Standards Compliance, NEBS Level 3 Certification

The SSU 2000 and SSU 2000e are designed to meet the latest and evolving industry standards, including ANSI, Telcordia, ITU-T G.811, G812, G.823, G.703, G.704, ETSI, and CE. The SSU 2000 is fully Network Equipment Building System (NEBS) Level 3 certified.


### Intelligent Cards

Each card has an integrated CPU with software for superior reliability, flexibility and functionality. Cards can be hot-swapped while the unit is operating without any degradation of the output signals. Each intelligent card supports the management of critical, major and minor alarms. Powerful management can be performed to and within each card through the communication card, including in-service upgrades of software and programmable logic devices.

**Auto-reconfiguration:** If a card is removed and a like card installed in the same slot, the new card will be automatically configured to the same settings as the previous card.

### GNSS Cards

The SSU 2000/SSU 2000e integrates single or dual satellite system receiver cards to meet primary reference clock requirements. Integrated capability delivers these key benefits:

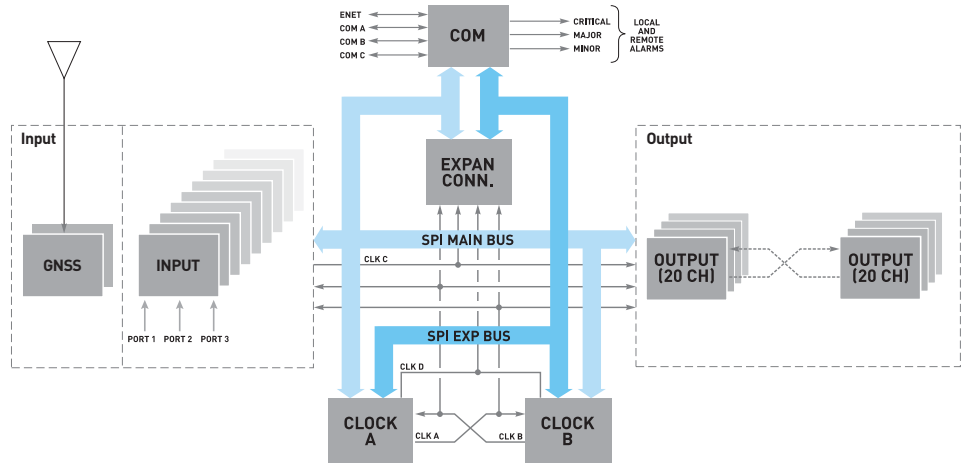

SSU 2000/SSU 2000e Block Diagram

- Flattens the number of levels in the synchronization distribution hierarchy
- Improves the overall performance of the network
- Lowers the overall OAM&P costs (Operation, Administration, Maintenance, and Provisioning).
- Single unit PRS

Two cards are available: The GNSS card supports GPS and GLONASS signals and can be locked to either one or both simultaneously. Also available is a dedicated GPS-only card.

### Input Cards

The SSU 2000 accepts up to nine input cards; the SSU 2000e accepts up to three input cards. The platform supports the following input signals:

- T1 (framed)
- E1 (framed)
- SSM quality
- JSW and JCC (Japan)
- 1 MHz (sine or square)
- 1.544 MHz (sine or square)
- 2.048 MHz (sine or square)
- 5 MHz (sine or square)
- 10 MHz (sine or square)

In the SSU 2000e each input slot supports connections for termination, bridging, monitoring and traffic pass-thru. These connectors provide performance monitoring, impedance termination and traffic pass through to network elements and input references.

Various input impedance panels are available for the SSU 2000 to support the following balanced or unbalanced signal impedances:

- 50 ohms (sine)
- 75 ohms (T1/E1)
- 100 ohms (T1)
- 120 ohms (E1)
- 133 ohms (CC)
- High impedance for timing extraction only (bridging mode)
- Panel/adaptor connection interfaces:
  - ◆ Wire wrap
  - ◆ BNC
  - ◆ Siemens
  - ◆ DE-9

Input signals are passed through to corresponding outputs in case of multiple internal failures, including clock failures.

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

### Intelligent Clock Cards, Superior Holdover Performance

The SSU 2000/SSU 2000e accepts single or dual clocks. Three clock cards are available to meet different international standards and specific holdover requirements: ITU-T Type 1 (ETSI Slave Clock, enhanced quartz oscillator), Type II (Stratum 2E, enhanced rubidium oscillator), and Type III (Stratum 3E, enhanced quartz oscillator). Redundant configurations may use a mix of technologies. In case of loss of GNSS and input references, the SSU 2000/SSU 2000e uses intelligent software to provide enhanced output performance beyond the required holdover stability. Its superior holdover capability retains stratum G.812 performance for three weeks during holdover conditions with Microsemi rubidium technology.

### Output Cards

The SSU 2000's main shelf supports 8 output cards, providing up to 160 unprotected outputs. Up to four expansion shelves can be added, providing up to 1120 additional unprotected output ports. The output cards may be configured for redundant operation.

The SSU 2000e's main shelf supports up to 6 output cards, providing up to 60 protected or unprotected output ports. Up to four expansion shelves can be added, providing up to 400 additional protected or unprotected output ports.

Any output card can be removed or inserted while power is applied without affecting the operation of any other card or the system. Various output cards are available to meet specific signal and interconnection requirements including T1, E1, CC, JSW, JCC, and RS-422. The activation of the output ports are fully user controllable.

### E1/2.048 MHz Output Card

The E1/2.048 MHz output card has 20 ports that are software-selectable for either E1 or 2.048 MHz output signals. The E1 signal has a multiframe format, with selectable Channel Associated Signaling (CAS) or Common Channel Signaling (CCS).

### T1 (DS1) Output Cards and Capabilities

The T1 output card has 20 ports. The T1 output card generates phase-locked output signals of 1.544 MHz.

### E1 and T1 Line Retiming Units (LRU)

The SSU 2000 supports both E1 and T1 line retiming units (LRU). The LRU is comprised of a Line Re-timing Module (LRM) and a Cut-Through Assembly (CTA). The LRU is a four-port (quad) card. The LRU inserts E1 or T1 signals on both sides of a cross connect panel in a central office. Side 1 of the re-timer provides "3R" (Re-shape, Re-amplify, and Re-time) for the signal to a client network element. When the LRU receives a data stream, it re-times the data with the transmit clock signal. The clock signal is inserted into the line route between two path-terminating elements. Side 1 is the direction in which timing is applied, and contains the line performance reporting and AIS generator. Side 2 provides "2R", which Re-shapes and Re-amplifies (regenerates) the signal from the client network element.

### Composite Clock Output Card

The Composite Clock output card generates 20 signal pairs (TIP and RING signal pairs). Each output is a transformer-coupled symmetrical pair. Each output pair can be turned off independently of other channels. Relays on each output allow for disconnecting the driver output from the output pins.

### RS-422 Output Card

The RS-422 output card generates 10 balanced square-wave outputs (TIP and RING signal pairs on ports 1-10) and 10 single-ended (RING) TTL square wave outputs on ports 11-20. Each output can be turned off independently of other ports. Relays on each output disconnect the driver output from the output pins.

### Connectivity

For the SSU 2000, there are a variety of input and output panels available with several types of connectors. These include DE9, wire-wrap, BNC, and Siemens type connectors. Also available are high density wire wrap panels in both 80 and 100 output versions. For the SSU2000e, DE9 connectors are included in the shelf design.

### Synchronization Status Messages (SSM)

The input card reads and processes SSM in accordance with ITU-T and ANSI standards to determine the traceability of inputs. This traceability information is then used by the clock cards in selecting a reference signal, and is embedded into the system's outputs. An embedded, editable table allows upgrades as standards evolve.

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

### Communications, Management and Security

The SSU 2000/SSU 2000e operates with a single communications card, available with basic features or with an enhanced security and SNMP option. The communications card supports TL1 and the Interactive Command Set (ICS), ASCII management interfaces. Coupled with Microsemi's advanced management software solutions, the communication module provides powerful fault, configuration, accounting/inventory, performance, security, and other optional management functions.

Network administrators can schedule automatic firmware upgrades. System firmware in the master and expansion shelves can be scheduled for automatic updates without further human intervention. Using a secure FTP (SFTP) connection, the communications card can automatically download firmware from a remote server to upgrade the SSU 2000/ SSU 2000e system. The Comms R card has NTP client functionality, making it easy to set the system log times to align with an NTP server. Two system images can be stored on the card, giving the user the ability to update or revert to a standby image with a simple command.

### RADIUS, SSH, and SFTP option

The communications card supports optional security features such as support for Remote Authentication Dial-In User Service (RADIUS) authentication, Secure Shell (SSH) and Secure File Transfer Protocol (SFTP). This option was designed for environments where secure access to network elements is critical. Using SSH-encrypted client authentication and up to 32 characters for user ID and password access, it enables communication with a centralized server to authenticate remote users and authorize their access to the SSU 2000/SSU 2000e system. Four access levels (user, technician, supervisor or administrator) and automatic logout provide superior security access to the system, ideally suited to enterprise and international gateway deployments where secure remote access is required. Also included in this software option is support for SNMP v2 or v3.

### TimeCraft

Available to support the SSU 2000/SSU 2000e, TimeCraft is an easy-to-use Graphical User Interface (GUI) management tool that reduces the complexity of using TL1 or ICS commands. Its intuitive GUI allows the operator to supervise and control a network element either remotely or locally through icons and simple point and click operations.

TimeCraft capabilities include support for remote firmware upgrades and provisioning to the port level, event-driven fault management, physical and logical configuration management, and performance and security management.

### TimePictra®


The SSU 2000/SSU 2000e is fully supported by Microsemi's TimePictra advanced Synchronization Management System. TimePictra provides full FCAPS capabilities (fault, configuration, accounting/inventory, performance and security) as well as an array of advanced management features.

### Microsemi Global Services

Microsemi provides synchronization services that assist customers with the planning, deployment and maintenance of synchronization infrastructure. Services are designed to help lower costs, streamline processes, ensure quality, and deliver the highest level of performance from your synchronization network.

The Platform Maintenance service bundles together Microsemi's industry leading technical support along with all software maintenance. As part of Platform Maintenance, customer will receive all updates as well as all upgrades including all patches, point releases, maintenance releases and related documentation for your purchased version of software during the contract period.

#### SSU 2000 Access Using RADIUS Authentication

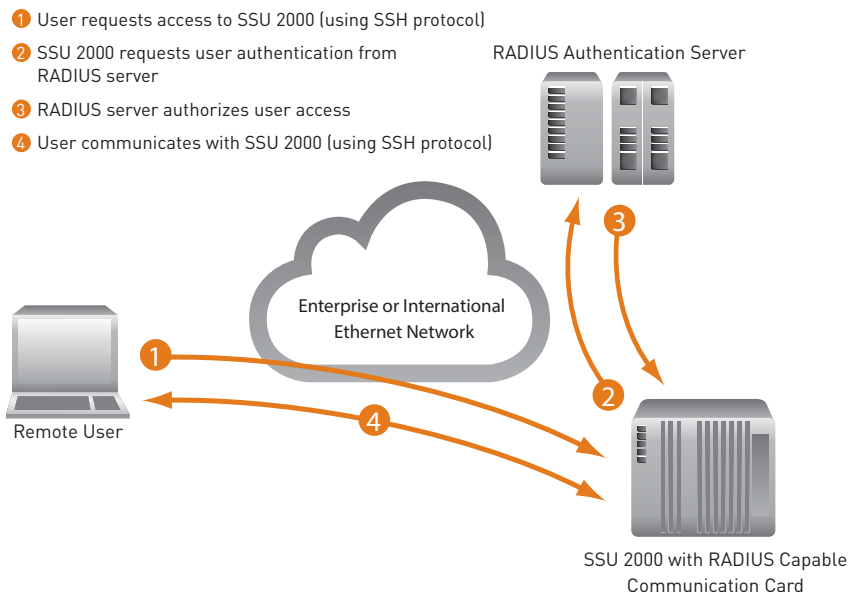

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

### Specifications

#### Shelf Architecture, Capacity

##### SSU 2000 System

- SSU 2000 Main Shelf, 12 slots: 2 clock, 1 communication, 9 for either input or output cards.
  - ◆ 27 total maximum input ports
  - ◆ 160 total maximum unprotected output ports
  - ◆ 80 total maximum protected output ports
- SDU 2000 Expansion Shelf, 16 slots: 2 buffer cards, 14 output cards  
System supports 4 expansion shelves. The last expansion shelf in the chain can be located up to 200 feet away from the main shelf.
  - ◆ 280 total maximum unprotected output ports per shelf
  - ◆ 140 total maximum protected output ports per shelf
- SSU 2000 system total output capacity (main shelf plus 4 expansion shelves)
  - ◆ 1280 total maximum unprotected output ports
  - ◆ 640 total maximum protected output ports

##### SSU 2000e System

SSU 2000e Main Shelf: 12 slots: 2 clock, 1 communication, 3 input cards, 6 output cards.

Output slots are pre-wired for redundant pairs.

- ◆ 9 total maximum input ports
- ◆ 60 total maximum protected or unprotected output ports

SDU 2000e Expansion Shelf, 12 slots: 2 buffer cards, 10 output cards.

System supports 4 expansion shelves. Output slots are pre-wired for redundant operation. The last expansion shelf in the chain can be located up to 60 meters away from the main shelf.

- ◆ 100 total maximum protected or unprotected output ports

SSU 2000e system total output capacity (main shelf plus 4 expansion shelves)

- ◆ 460 total maximum protected or unprotected output ports

#### Input

##### Input Card Types

- T1 framed, 1/1.544/2.048/5/10MHz sine or square wave, user settable
- E1 framed, 1/1.544/2.048/5/10MHz sine or square wave, user settable
- Composite Clock
- 1.544MHz or 6.312MHz sine wave (Japan)
- Composite Clock (Japan)
- GNSS (GPS and GLONASS)
- GPS only

##### Input Capabilities

- Embedded Sync Status Messaging (SSM)
  - ◆ Compliant with SSM specification per T1X1.3 TR33, ANSI T1.101-1999, ITU-T G.704, and Telcordia GR-253-CORE
- Integrated performance measurements (TIE, MTIE, TDEV, ERROR RATES) on all inputs

- Selection mode: Priority, SSM, Performance Mask
- Real time CPU: Intelligent software for real-time MTIE, TDEV and TIE performance monitoring.

##### GNSS/GPS Cards

- Integrated single or dual (protected input) cards
- Compliant with Stratum 1 PRS (Primary Reference Source) per ANSI T1.101-1999, ITU-T G.811, Telcordia GR-2830/1244-CORE, and ETSI EN300 462-6.

#### Performance Measurement

##### Resolution

- Measurements are provided for each input versus each clock at a resolution of 1 ns

##### Sampling Rate

- 40Hz for all frequency cards
- 1 Hz for GNSS/GPS cards
- 1 Hz averaging

#### Calculations

##### MTIE

- Meets or exceeds the latest ITU-T, ANSI and Telcordia standards with measurement intervals of 0.05 to 100,000 seconds. GNSS/GPS is 1 to 100,000 seconds

##### TDEV

- Exceeds the latest ITU-T, ANSI and Telcordia standards with measurement intervals of 0.1 to 10,000 seconds.

##### Phase

- 1, 100, 1000, and 10,000 second phase averages and history are available.

##### Frequency

- Frequency measurements can be viewed via user selectable calculation periods from 10 to 10,000 seconds.

#### Clock

##### Clock Card Types

- Enhanced Rubidium, Stratum 2E Type II
- Enhanced Quartz, Stratum 3E Type III
- Enhanced Quartz, Type I for ITU-T standards

##### Clock Performance

- Compliant with clock levels per ANSI T1.101-1999, ITU-T G.812, Telcordia GR-2380/1244-CORE and ETSI EN300 462-4

##### Control

- DDS (Direct Digital Synthesis) technology for cost-effective calibration-free operation and precise frequency control

#### Output

##### Output Card Types

Signal outputs meet ITU-T G.811 after SSU is locked to Cesium or GNSS input reference and compliant with SSM specification per ITU-T G.704

All frequency cards have 20 output ports

- T1 (DS1)
- E1, port selectable 2.048MHz/2.048Mbps

# SSU 2000/SSU 2000e

## Synchronization Supply Unit (SSU) for Carrier-Grade Networks

### Specifications

- Composite Clock
- RS-422 (10 ports) and TTL (10 ports) provide output frequencies from 8kHz to 4096kHz in 8kHz steps
- Sine Wave, 1.544MHz or 6.312MHz (Japan)
- Composite Clock (Japan)

### Redundancy

- 1+1 output protection (both cards active)

### Communication and Management

#### Management

- The SSU 2000/SSU 2000e is a fully automated and software manageable system. Firmware upgrades can be remotely installed.

#### Communications Card Ports

- RS-232 (EIA-232)
- Ethernet, 10Base-T, and 100 Base-T

#### Management Interface Protocols

- Simple fault, visual & contact closures
- TCP/IP, IPv4
- TL1
- Interactive Command Set (ICS), ASCII
- SNMPv2, SNMPv3 (optional)

RS-232 ports support ASCII and TL1, and Ethernet port supports all of the above. The Ethernet port supports four telnet sessions, two TL1 sessions, and five SNMP messages

#### Event Log

- Stores up to 1000 events from any system faults, user interventions, and system actions. Events are time & date stamped to less than 1 msec.

#### Security

- RADIUS authentication (optional)
- Secure Shell (SSH) (optional)
- Secure FTP (SFTP)
- User ID length: up to 32
- User password length: up to 32
- User access levels: 4

### Management Software

Available management programs (see separate datasheets)

- TimeCraft Windows GUI-based local management terminal
- TimePictra Synchronization Management System

### Environmental

#### Power

- Dual -38 to -75 VDC
- SSU 2000: Less than 120 watts power consumption per shelf
- SSU 2000e: Less than 100 watts power consumption per shelf

#### Size (H x W x D)

- SSU 2000: 10.5" x 17" x 11.5" (26.7 cm x 43.2 cm x 293.2 cm)
  - SSU 2000e: 19.6" x 17" x 9" (50 cm x 43.2 cm x 22.9 cm)
- Widths do not including mounting ears

#### Weight (provisioned)

- SSU 2000: approx. 27 lbs (12.3kg) main unit
- SSU 2000e: approx. 27 lbs (12.3kg) main unit

#### Temperature

- Operating temperature: 0°C to 50°C
- Storage temperature: -20°C to 75°C
- Relative humidity: 100% non-condensing

#### EMC

- Radiated emissions per Class B requirements
- EN 300 386-2
- GR-1089-CORE

#### RoHS

- Compliant



#### Microsemi Headquarters

One Enterprise, Aliso Viejo, CA 92656 USA  
Within the USA: +1 (800) 713-4113  
Outside the USA: +1 (949) 380-6100  
Sales: +1 (949) 380-6136  
Fax: +1 (949) 215-4996  
email: [sales.support@microsemi.com](mailto:sales.support@microsemi.com)  
[www.microsemi.com](http://www.microsemi.com)

Microsemi, a wholly owned subsidiary of Microchip Technology Inc. (Nasdaq: MCHP), offers a comprehensive portfolio of semiconductor and system solutions for aerospace & defense, communications, data center and industrial markets. Products include high-performance and radiation-hardened analog mixed-signal integrated circuits, FPGAs, SoCs and ASICs; power management products; timing and synchronization devices and precise time solutions, setting the world's standard for time; voice processing devices; RF solutions; discrete components; enterprise storage and communication solutions, security technologies and scalable anti-tamper products; Ethernet solutions; Power-over-Ethernet ICs and midspans; as well as custom design capabilities and services. Learn more at [www.microsemi.com](http://www.microsemi.com).

Microsemi makes no warranty, representation, or guarantee regarding the information contained herein or the suitability of its products and services for any particular purpose, nor does Microsemi assume any liability whatsoever arising out of the application or use of any product or circuit. The products sold hereunder and any other products sold by Microsemi have been subject to limited testing and should not be used in conjunction with mission-critical equipment or applications. Any performance specifications are believed to be reliable but are not verified, and Buyer must conduct and complete all performance and other testing of the products, alone and together with, or installed in, any end-products. Buyer shall not rely on any data and performance specifications or parameters provided by Microsemi. It is the Buyer's responsibility to independently determine suitability of any products and to test and verify the same. The information provided by Microsemi hereunder is provided "as is, where is" and with all faults, and the entire risk associated with such information is entirely with the Buyer. Microsemi does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other IP rights, whether with regard to such information itself or anything described by such information. Information provided in this document is proprietary to Microsemi, and Microsemi reserves the right to make any changes to the information in this document or to any products and services at any time without notice.

©2019 Microsemi, a wholly owned subsidiary of Microchip Technology Inc. All rights reserved. Microsemi and the Microsemi logo are registered trademarks of Microsemi Corporation. All other trademarks and service marks are the property of their respective owners.